


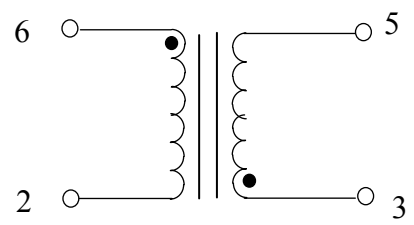



- ★ Use For POTS Splitter Application
- ★ Stable Inductance with DC Bias
- ★ Small Packages in RM6 THT Type

| Specifications | | | | | | |
|----------------|-------------|-------------------------------------|---------------------------------|-----------------|-----------------|--|
| Part Number | Application | Inductance@100mA 10KHz/100mV(mH) | Inductance 10KHz/100mV(mH) | DCR (Ω Max) | Hi-Pot (Vdc) | |
| AR5013 | Inductor | (6-2) 2.4mH±5% (5-3) 2.4mH±5% | (6-5) 9mH (2-3)short.5% TYP | (6-2)=(5-3)=2.5 | 500 | |
| AR5021 | Inductor | (6-2)4.6mH±5% (5-3) 4.6mH±5% | (6-5) 18mH (2-3)short.5% TYP | (6-2)=(5-3)=5.5 | 500 | |
| | | | | | | |
| | | | | | | |
| | | | | | | |

Dimension

Schematic



Data sheet subject to change without notice