


★ Use For POTS Splitter Application





★ Stable Inductance with DC Bias

★ Small Packages in EP13 THT Type

Specifications						
Part Number	Application	Inductance (uH)	Inductance @100mA (uH)	Turn Ratio (±1%)	DCR (Ω Max)	Hi-Pot (Vdc)
AR5020	Inductor	(1-4) 5.5mH±5% (2-5) 5.5mH±5%	(1-5) 22mH -7% TYP	(1-4)/(2-5)=1.00	(1-4)=(2-5)=6.25	1000

Dimension

Schematic

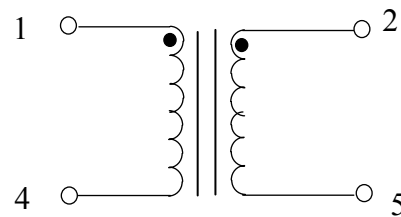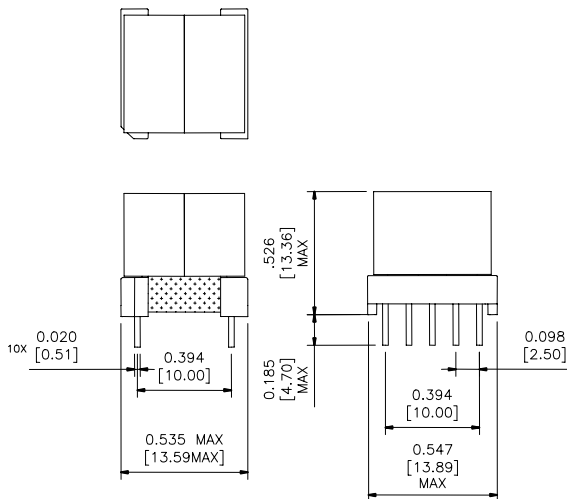

Data sheet subject to change without notice