




Inductor for POTS Splitter Application



★ Use For POTS Splitter Application



★ Stable Inductance with DC Bias

★ Small Packages in EE13 THT Type

Specifications							
Part Number	Application	Inductance@100mA (mH)	Inductance (mH)	Impedance (Min)		DCR (Max)	Hi-Pot (Vdc)
				1KHz	4KHz		
AR5049	Inductor	(1-5) 5mH±8% (6-10) 5mH±8%	(1-10) 20mH, (5-6) shorted ±10%	(1-5)=(6-10)=30	(1-5)=(6-10)=120	(1-5)=(6-10)=5	500

Dimension

Schematic

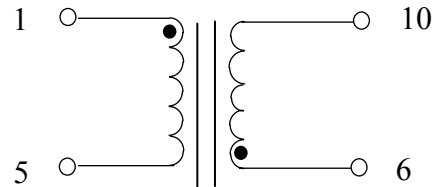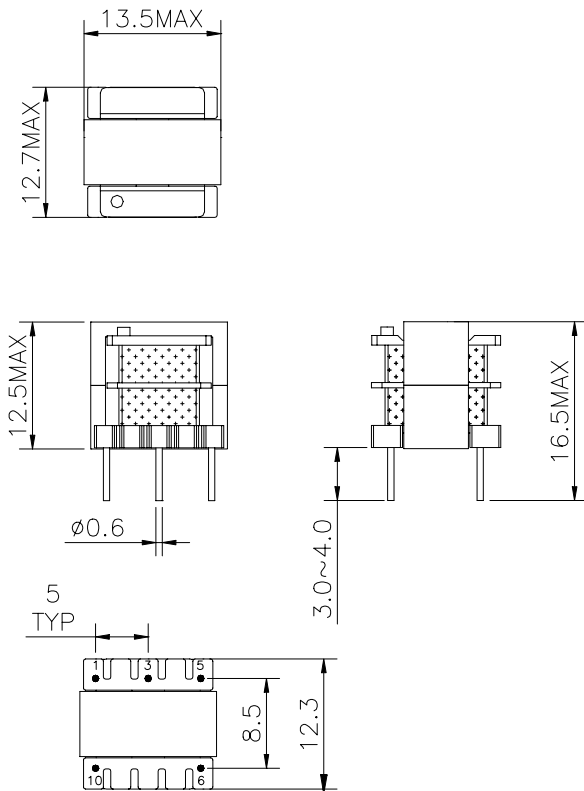

Data sheet subject to change without notice