


★ Use For POTS Splitter Application

★ Stable Inductance with DC Bias






★ Small Packages in RM5 SMD Type



Specifications						
Part Number	Application	Inductance@100mA (mH)	Inductance (mH)	DCR (Max)	Hi-Pot (Vdc)	
AR5065	Inductor	(4-3) 2.23mH±5% (8-7) 2.23mH±5%	(4-7) 8.92mH,(3-8) shorted ±5%	(4-3)=(8-7)=2.8	500	
AR5066	Inductor	(4-3) 3.23mH±5% (8-7) 3.23mH±5%	(4-7) 12.92mH,(3-8) shorted ±5%	(4-3)=(8-7)=4.0	500	

Dimension

Schematic

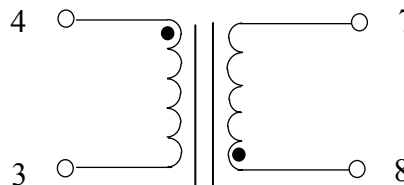

Data sheet subject to change without notice