
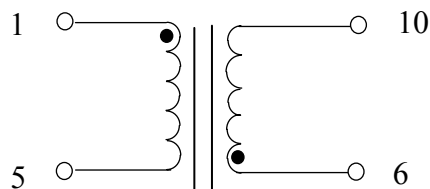



- ★ Use For POTS Splitter Application
- ★ Stable Inductance with DC Bias
- ★ Small Packages in EE13 THT Type

Specifications							
Part Number	Application	Inductance@100mA (mH)	Inductance (mH)	DCR (Max)		Hi-Pot (Vdc)	Type
AR5058	Inductor	(1-5) 3.25mH±8% (6-10) 3.25mH±8%	(1-10) 13mH,(5-6) shorted ±10%	(1-5)= 10	(6-10)=10	500	THT
AR5129	Inductor	(1-5) 1.75mH±8% (6-10)1.75mH±8%	(1-10) 7mH,(5-6) shorted ±10%	(1-5)= 5	(6-10)=5	500	THT

**Dimension**

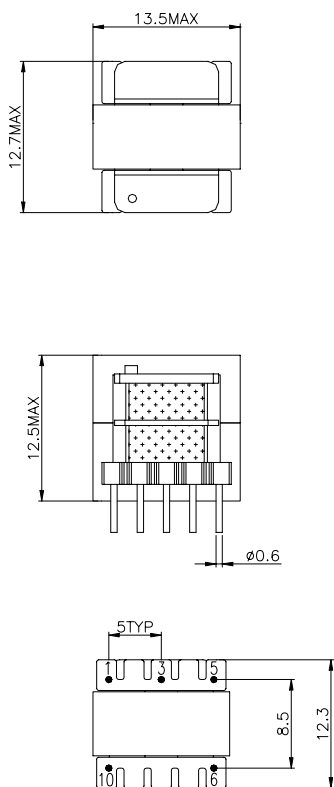

**Schematic**

Data sheet subject to change without notice