


★ Use For POTS Splitter Application

★ Stable Inductance with DC Bias






★ Small Packages in RM5 SMD Type



Specifications						
Part Number	Application	Inductance@100mA (uH)	Inductance (mH)	DCR (Max)	Hi-Pot (Vdc)	
AR5067	Inductor	(4-3) 761.7uH±5% (8-7) 761.7uH±5%	(4-7) 3.04mH,(3-8) shorted ±5%	(4-3)=(8-7)=1.0	500	
AR5068	Inductor	(4-3) 973.4uH±5% (8-7) 973.4uH±5%	(4-7)3.89mH,(3-8) shorted ±5%	(4-3)=(8-7)=1.2	500	
AR5070	Inductor	(4-3) 902uH±5% (8-7) 902uH±5%	(4-7)3.6mH,(3-8) shorted ±5%	(4-3)=(8-7)=1.2	500	

Dimension

Schematic

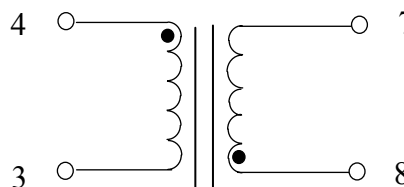

Data sheet subject to change without notice