


ISDN-U Interface Transformer






- ★ The Uko-Interface is used to connected the ISDN Public Exchange and Network Termination.
- ★ The Uko-Interface transmission code 4B3T and 2B1Q when consumer use the ISDN chips of different manufacturers on the personal application.

Specifications					
Part Number	Application	Turn Ratio (2%) (1-4):(7-5)	OCL @ 10 KHz, 0.1 V (1-4) with 50mA	DCR (1-4)	DCR (7-5)
UT5009	ISDN-U	1.25:1	26.6-29.4mH	12 ohms Max	9.0 ohms Max



Specifications continue				
Part Number	Cww 10KHZ,0.1V	Leakage Inductance 100KHZ,0.1V	Idc	Isolation Voltage (Vrms)
UT5009	90pF MAX	120 uH	50 mA	2000

Dimension

Schematic

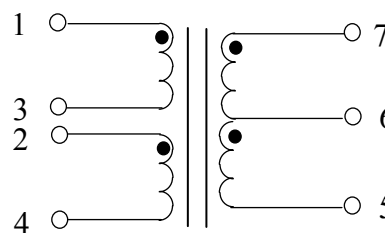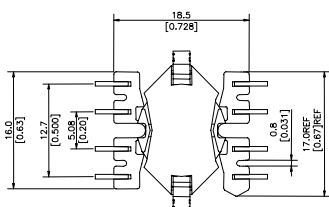

UT5009



Data sheet subject to change without notice