


★ Use For POTS Splitter Application

★ Stable Inductance with DC Bias






★ Small Packages in RM4 THT Type



Specifications						
Part Number	Application	Inductance (uH)	Inductance @100mA (uH)	DCR (Ω Max)	Hi-Pot (Vdc)	
AR5124	Inductor	(6-2) 300uH±3% (5-3)300uH±3%	(6-5)1.1mH (2-3)short.5% TYP	(6-2)=(5-3)=1.0	500	
AR5125	Inductor	(6-2) 510uH±3% (5-3)510uH±3%	(6-5)1.9mH (2-3)short.5% TYP	(6-2)=(5-3)=1.8	500	
AR5126	Inductor	(6-2)470uH±3% (5-3)470uH±3%	(6-5)1.70mH (2-3)short.5% TYP	(6-2)=(5-3)=1.4	500	

Dimension

Schematic

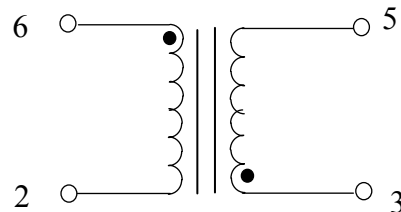

Data sheet subject to change without notice