


★ Use For POTS Splitter Application

★ Stable Inductance with DC Bias






★ Small Packages in EP13 THT Type



Specifications						
Part Number	Application	Inductance (mH)	Inductance@100mA (mH)	DCR (Ω Max)	Hi-Pot (Vdc)	
AR5189	Inductor	(1-5) 1.15mH±10% (6-10)1.15mH±10%	(1-10)4.5mH,(5-6) shorted ±5%	(1-5)=(6-10)<2	500	

**Dimension**

**Schematic**

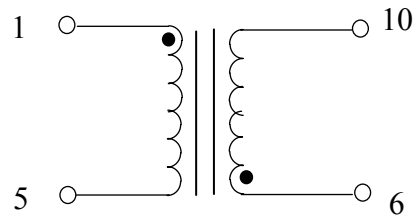

Data sheet subject to change without notice