



- ★ For use with Conexant Access Runner
- ★ Designed to meet IR 235^oC peak requirement
- ★ Excellent THD performance
- ★ Small EP13 Package in SMD and THT Type




Specifications					
Part Number	Application	Turn Ratio (2%) (1-5): (10-6)	OCL @ 10 KHz, 0.1 V (10-6), 7-9 shorted	Leakage Inductance (10-6)@ 100 KHz, 0.1 V	Longitudinal Balance (from 20 KHz to 1.1 MHz)
AT0010	Access Runner	1:3.3	800uH ±5%	12uH Max	-45 dB Min
AT5010					

Specifications continue				
Part Number	C _{ww} @10KHz, 0.1V	DCR (1-5)/(10-6)	Isolation Voltage (V _{rms})	Package
AT0010	35 pF Max	0.4Ω/1.5Ω Max	1500	SMD
AT5010				THT

Dimension

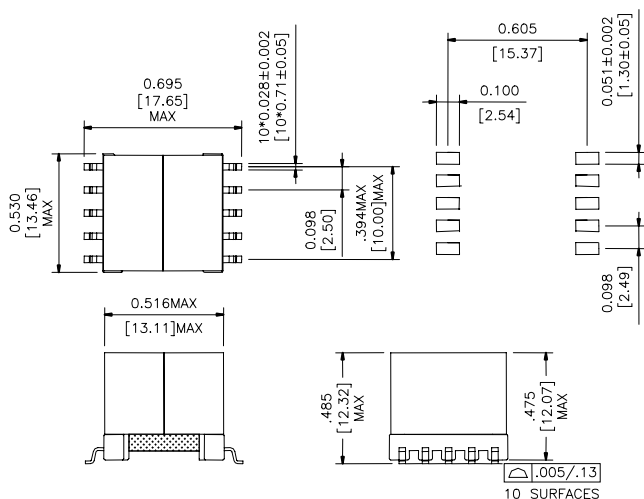


Schematic

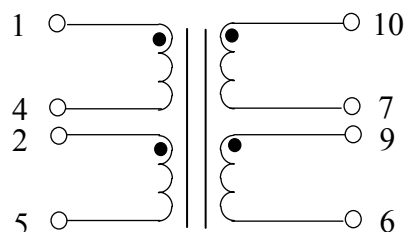


AT0010

Data sheet subject to change without notice

Dimension

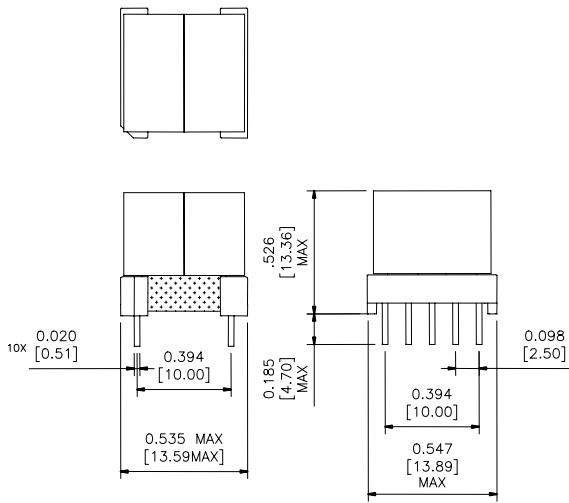

Schematic

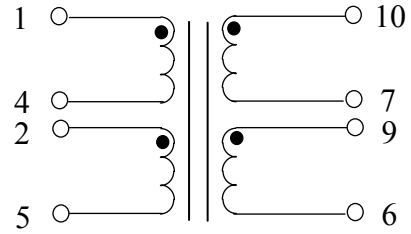

AT5010

Data sheet subject to change without notice