


★ Designed to meet ST microelectronics ST70135A & ST70134 CPE Side



★ Corresponding to EN60950 supplementary insulation for 250V working voltage and to UL1950 basic insulation for 120V working voltage



★ Low profile Package in SMD Type

Specifications					
Part Number	Application	Turn Ratio (2%) (10-5):(1-4)	OCL @ 10 KHz, 0.1 V (1-4), 2-3 shorted	Leakage Inductance (1-4)@ 100 KHz, 0.1 V	THD (30 KHz, 1Vrms)
AT0033	CPE	1:1	540H(±10%)	15uH Max	-65 dB Min

Specifications continue				
Part Number	DCR (1-4)=(10-5)	Isolation Voltage (Vrms)	Package	
AT0033	1.1 Ω ±15%	1500	SMD	

### Dimension

### Schematic

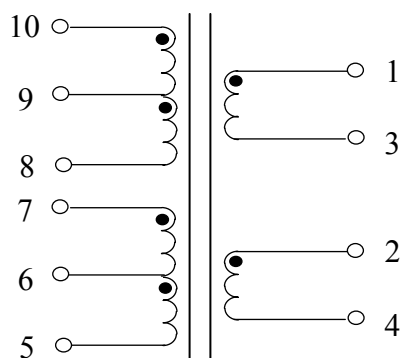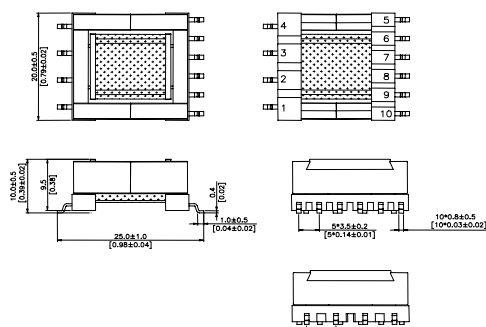

Data sheet subject to change without notice