



★ Designed to meet IR 235°C peak requirement




★ Excellent THD performance

★ Small EP10 Package in SMD and THT Type


Specifications(Operating temperture range:-40°C ~+85°C)					
Part Number	Application	Turn Ratio (±2%) (8-5) : (1-4)	OCL (5-8) @ 10KHz, 0.1 V	Leakage Inductance (5-8)@ 100 KHz, 0.1 V	THD @100 KHz, 12Vp-p
AT0035	SMD	1.9:1	400uH ±5%	6.0 uH max	-80 dB max
AT5035	THT	1.9:1	400uH ±5%	6.0 uH max	-80 dB max

Specifications continue				
Part Number	DCR (4-2)	DCR (3-1)	DCR (5-7)=(6-8)	Isolation Voltage (Vrms)
AT0035	0.15 Ω max	0.23 Ω max	0.45 Ω max	1500
AT5035	0.15 Ω max	0.23 Ω max	0.45 Ω max	1500

Dimension

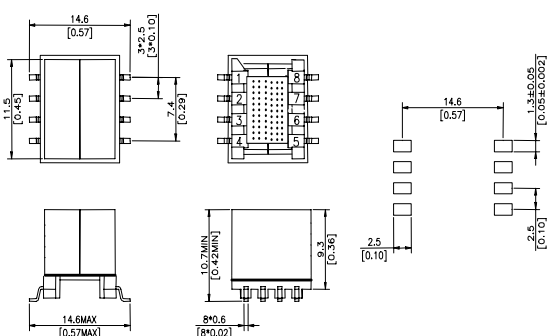


Schematic

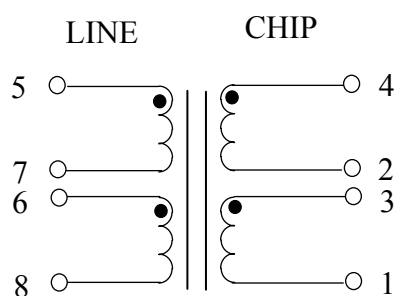


Data sheet subject to change without notice

Dimension

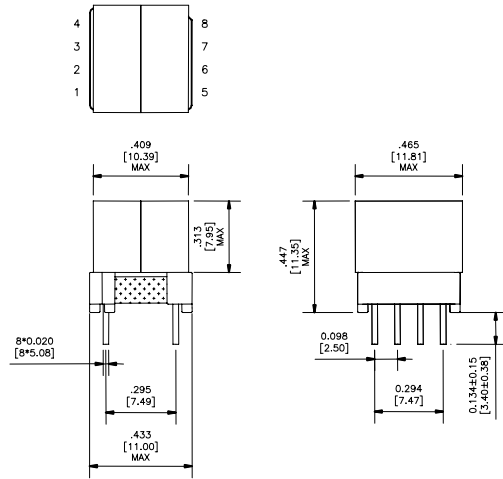

Schematic

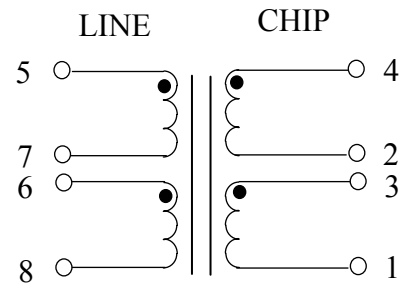

Data sheet subject to change without notice