


★ Designed to meet IR 235^oC peak requirement

★ Excellent THT performance


★ Small EP13 Package in SMD and THT Type




Specifications					
Part Number	Application	Turn Ratio (±1%) (1-5):(10-6)	OCL (10-6) @ 10 KHz, 0.1 V	Leakage Inductance (10-6)@ 100 KHz, 0.1 V	Longitudinal balance @100 KHz
DT0014	SMD	1:2	10mH ±10%	75 uH max	55 dB MIN
DT5014	THT	1:2	10mH ±10%	75 uH max	55 dB MIN

Specifications continue				
Part Number	THD @2KHz, 1Vrms	DCR (1-5)	DCR (10-6)	Isolation Voltage (Vrms)
DT0014	-80 dB MIN	4.6Ω ±10%	12 Ω ±10%	2000
DT5014	-80 dB MIN	4.6Ω ±10%	12 Ω ±10%	2000

Dimension

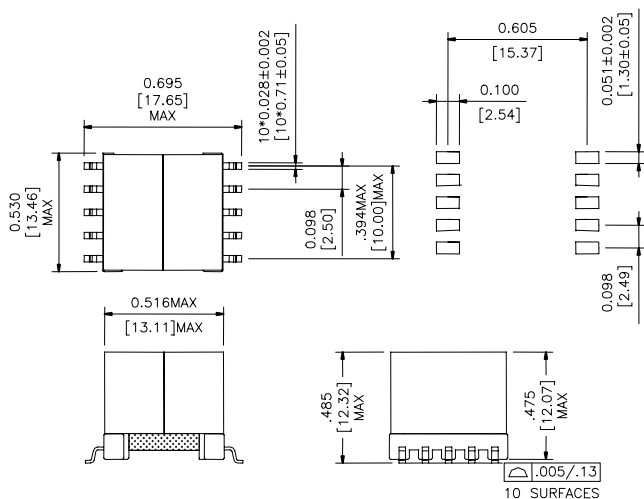


Schematic

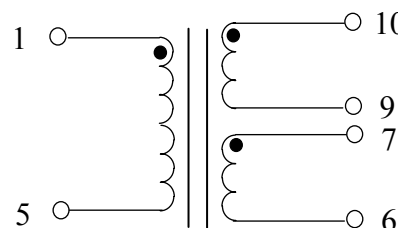


DT0014

Data sheet subject to change without notice

Dimension

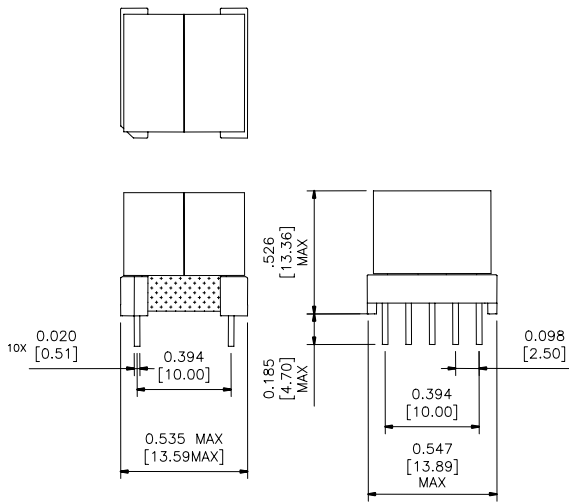

Schematic

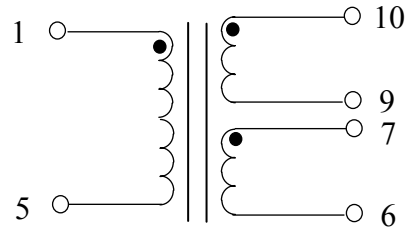

DT5014

Data sheet subject to change without notice