


★ Excellent THD performance

★ CUT1408 Package in THT Type





Specifications					
Part Number	Application	Turn Ratio (1%) (4-6):(1-3)	OCL (4-6) @ 1KHz, 1 V	Leakage Inductance (1-3)@ 10 KHz, 0.5 V	DCR (4-6) = (1-3)
DT5026	DDS	1:1	200mH min	22-45uH	20 Ω max

Specifications continue				
Part Number	Interwinding Capacitance @10KHz,0.1V	Insertion Loss @10KHz	Return Loss	Isolation Voltage 1sec,10mA(Vrms)
DT5026	66pF typ	1.25 ±0.25dB	100Hz-100KHz : 15dB typ 1KHz: 30dB typ	1250

Dimension

Schematic

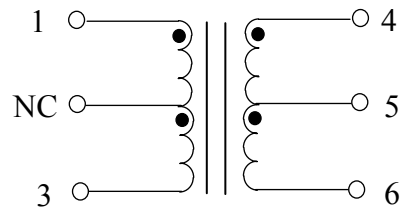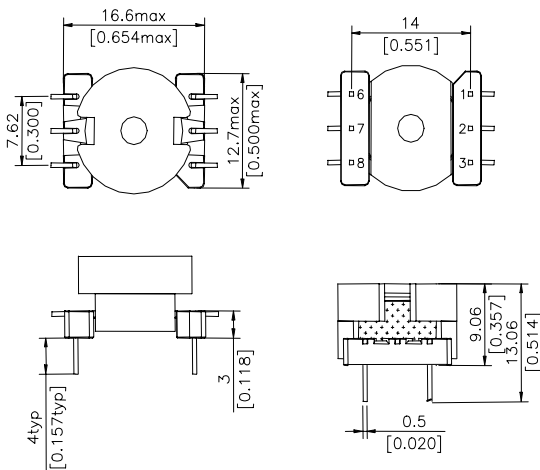

DT5026

Data sheet subject to change without notice