


★ Designed to meet IR 235^oC peak requirement



★ 3.6A DC Capacity, Low Power Loss



★ Small EP13 Package in THT Type

Specifications				
Part Number	Application	OCL @ 10 KHz, 0.1 V With 3.6A DC (1 thru 5 to 6 thru 10)	DCR (1 thru 5 to 6 thru 10)	SRF (1 thru 5 to 6 thru 10)
PC0001	THT	33-42uH	60m Ω Max	2.0MHz Min

Specifications continue		
Part Number	Isolation Voltage Winding to CORE 2SEC,5mA(Vdc)	
PC0001	500	

Dimension

Schematic

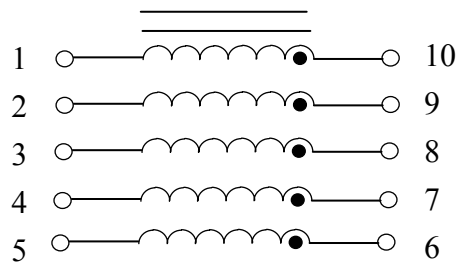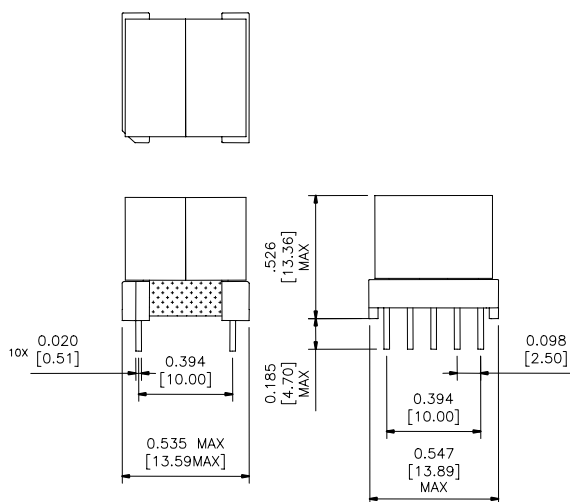

Data sheet subject to change without notice

PC0001