


- ★ Matched to CCITT.I-430 designed
- ★ Matched to Various transceiver chip
- ★ Excellent longitudinal balance


Specifications				
Part Number	Application	Turn Ratio(2%) (1-2):(3-4):(7-8):(5-6)	OCL @ 100 KHz, 0.1 V Withm 150mADC (1-4), shorted 2-3	Leakage Inductance(uH) @100KHz,0.05v, (1-4),shorted 2-3,7-6
ST0005	ISDN-S	1:1:2.6:4	180uH min	4uH max

Specifications continue					
Part Number	DCR (7-8)	DCR (5-6)	DCR (1-2)=(3-4)	C _{ww} @10 KHz, 0.1 V (1-4)&(5-8)	Isolation Voltage (V _{rms})
ST0005	1.0 ohms Max	2.0 ohms Max	500m ohms Max	50pF max	1500

Dimension

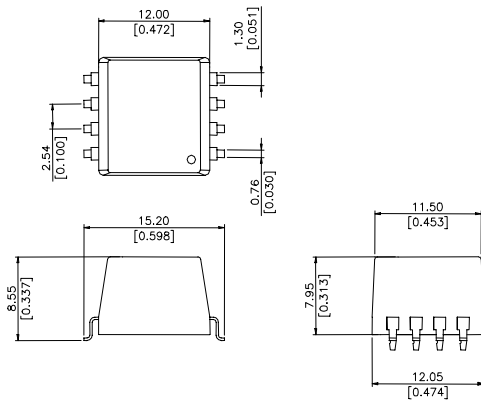

Schematic

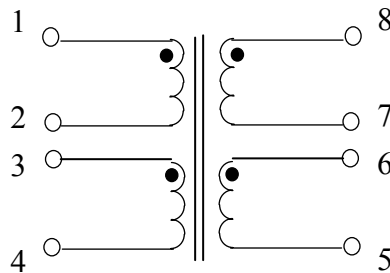

ST0005

Data sheet subject to change without notice