



- ★ Matched to CCITT.I-430 designed
- ★ Matched to Various transceiver chip
- ★ Excellent longitudinal balance

Specifications					
Part Number	Application	Turn Ratio(2%) (5-8):(12-9) (1-4):(16-13)	OCL @ 10 KHz, 0.1 V Withm 1mA (1-4)&(5-8)	DCR (1-4)&(5-8)	DCR (12-9)&(16-13)
ST5004	ISDN-S	1:2	22mH min	2.5 ohms Max	5.0 ohms Max

Specifications continue			
Part Number	Leakage Inductance(uH) @100KHz,0.1v, (1-4)&(5-8)	C _{ww} @10 KHz, 0.1 V (1-16)&(5-12)	Isolation Voltage (Vrms)
ST5004	10uH max	120pF max	2000

Dimension

Schematic

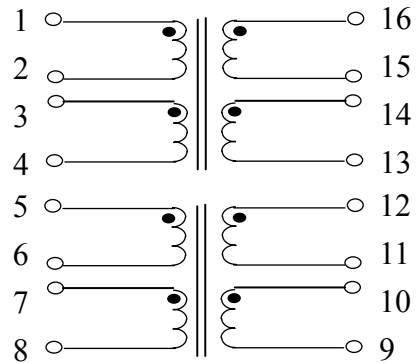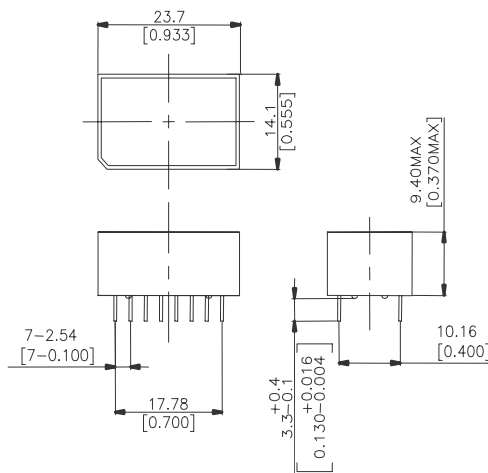

ST5004

Data sheet subject to change without notice