

ISDN-S Interface Transformer





- ★ Matched to CCITT.I-430 designed
- ★ 2KVrms or higher voltage isolation
- ★ Excellent longitudinal balance

Specifications				
Part Number	Application	Turn Ratio (2%) (1-3):(4-6)	OCL @ 10KHz, 0.1 V (1-3) With Idc 1mA	Leakage Inductance 100KHZ,0.1V
ST5009	ISDN-S	1CT:2CT	22mH min	11uH min

Specifications continue				
Part Number	DCR (1-3)	DCR (4-6)	C _{ww} 10KHZ,0.1V	Isolation Voltage (Vrms)
ST5009	2.4 Ω±25%	2.4 Ω±25%	100pF max	2000

Dimension:

Schematic:

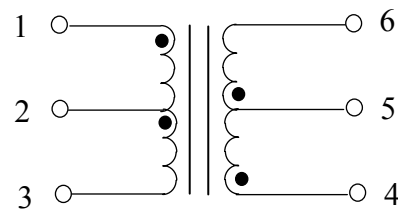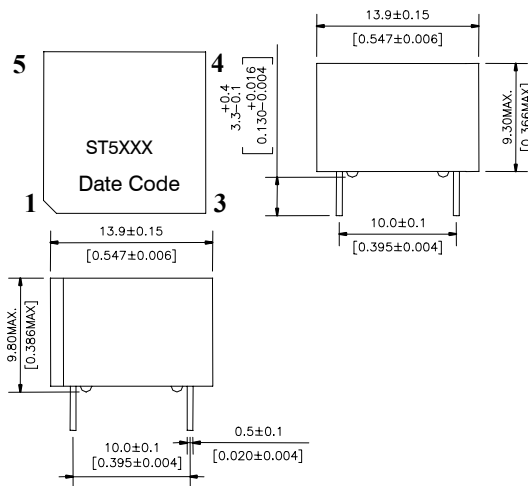

ST5009

Data sheet subject to change without notice