


★ Return loss meets requirements of G.703

★ Fast rise time compatible with standards


★ Surface mount packages




Specifications				
Part Number	Application	Turn Ratio(2%) (1-3):(4-6)	OCL @ 100 KHz, 0.1 V (1-3)&(4-6)	Leakage Inductance(uH) @100KHz,0.1v,
TC0003	T3	1:1	100uH min	0.2uH max
TC0004	T3	1CT:1CT	40uH min	0.12uH max

Specifications continue			
Part Number	C <sub>ww</sub> @10 KHz, 0.1 V (1+3)-(4+6)	Bandwidth 75Ω system	Isolation Voltage (V <sub>rms</sub> )
TC0003	12pF max	0.2-340 MHz typ	1500
TC0004	10pF max	0.2-340 MHz typ	1500


### Dimension

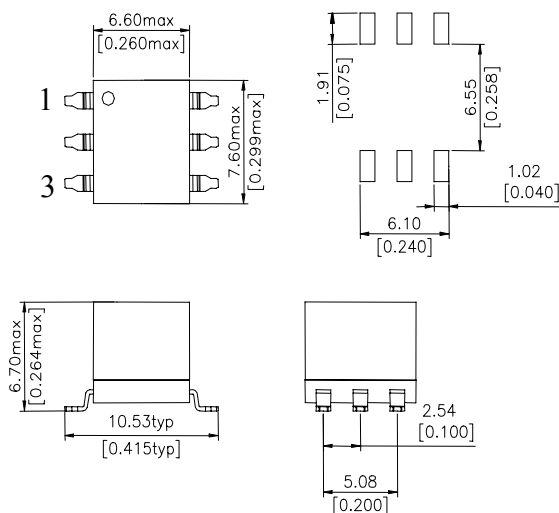

### Schematic

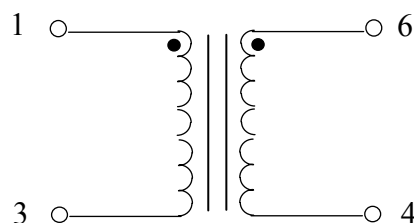

### TC0

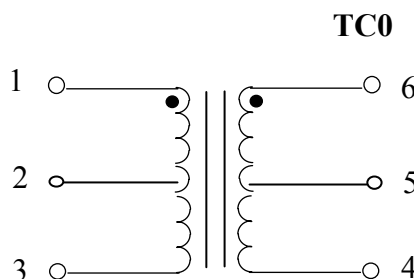

### TC0

Data sheet subject to change without notice