


★ Matched to Leading transceiver ICs




★ Designed to meet IR 235<sup>0</sup>C peak requirement

★ Small EP13 Package in SMD Type


Specifications					
Part Number	Application	Turn Ratio (2%) (1-5):(9-6)	OCL @ 10 KHz, 0.1 V (1-5), 2-4 shorted	DCR (1-5), 2-4 shorted	DCR (9-6)
UT0002	ISDN-U	2CS:1CT	13-18mH	8.5 ohms Max	5.0 ohms Max

Specifications continue				
Part Number	Return Loss 10 KHz-25 KHz	Longitudinal Balance (from 281 KHz to 40 KHz)	Idc	Isolation Voltage (Vrms)
UT0002	20 dB MIN	-55 dB Min	60 mA	1500

### Dimension

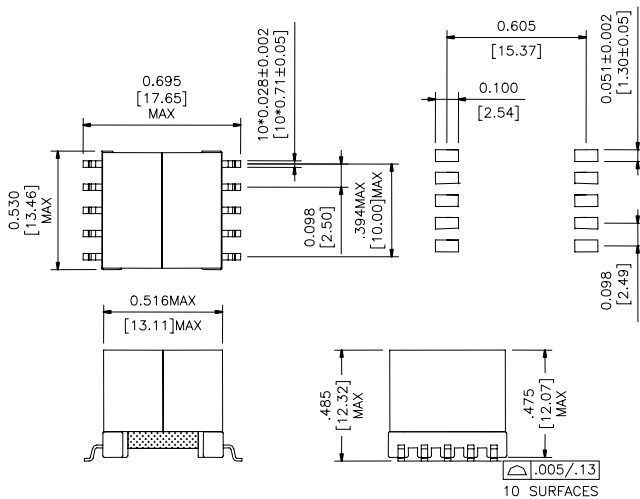

### Schematic

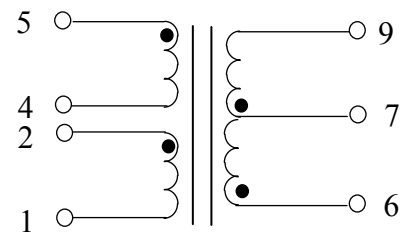

**UT0002**

Data sheet subject to change without notice