


# Inductor for POTS Splitter Application

★ Use For POTS Splitter Application

★ Stable Inductance with DC Bias



★ Small Packages in EP13 SMD Type



Specifications						
Part Number	Application	Inductance @100mA (mH)	Inductance (mH)	DCR (Ω Max)	Hi-Pot (Vdc)	
AR5150	Inductor	(1-5) 6mH±7% (6-10) 6mH±7%	(1-10)24mH,(5-6) shorted ±5%	(1-5)=(6-10)=5	500	

## Dimension

## Schematic

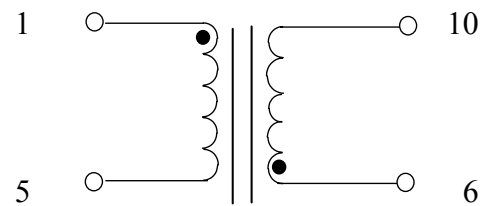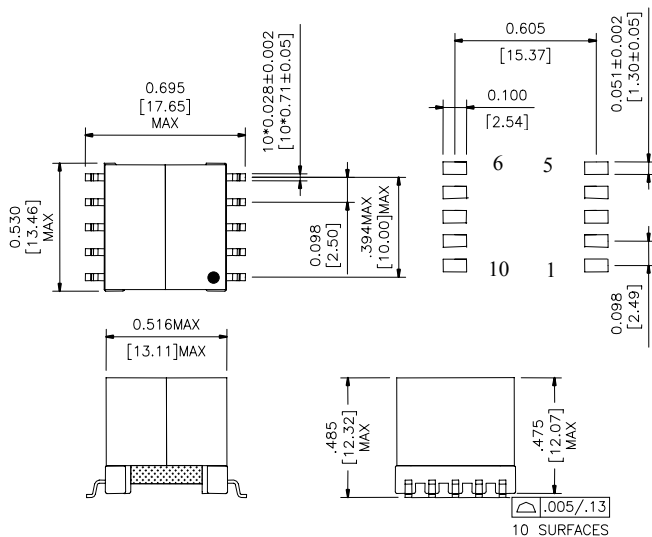

Data sheet subject to change without notice